

ATLAS 25L



218,4 kNm



8,2 bis
10,0 m



3,5 bis
3,6 m



3,4 bis
5,2 m



2.620 kg



415°



42 kNm








220 bar



2 x
80 l/min
ca. 64 kW







LS
180 l/min
ca. 83 kW

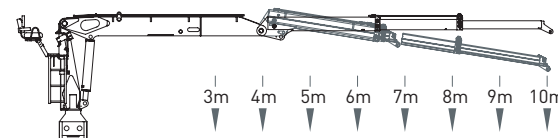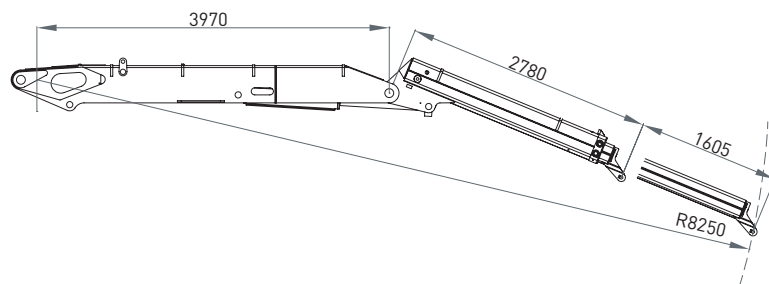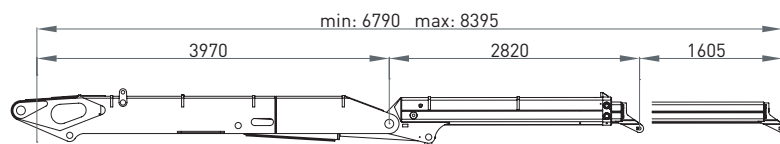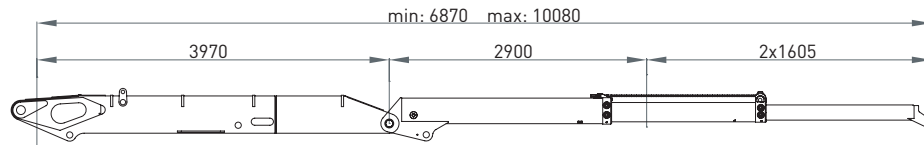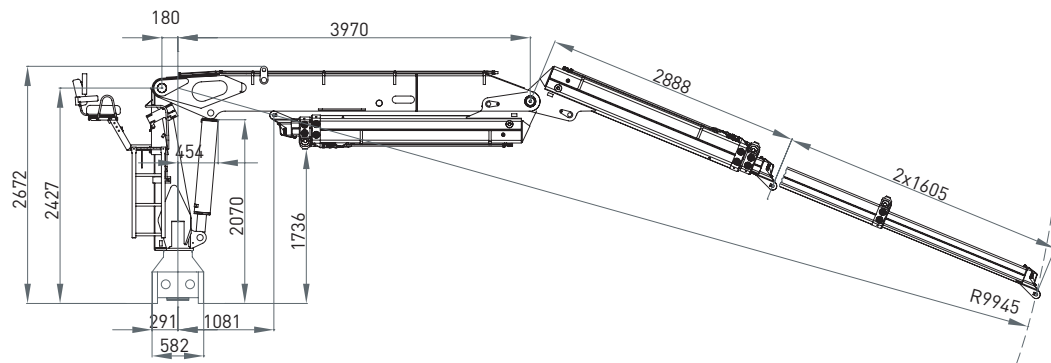


	3m	4m	5m	6m	7m	8m	9m	10m	
8,2 m	7460	5600	4480	3730	3195	2760	-	-	kg
8,4 m*	7460	5600	4480	3730	3195	2760	-	-	kg
10,0 m	7290	5465	4375	3650	3125	2700	2400	2160	kg
10,0 m*	7290	5465	4375	3650	3125	2700	2400	2160	kg


* gestreckt

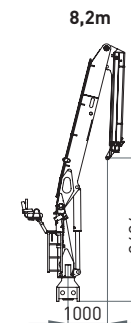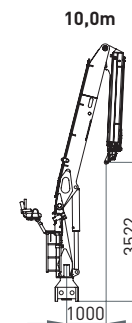


Schwenkabstützung breit

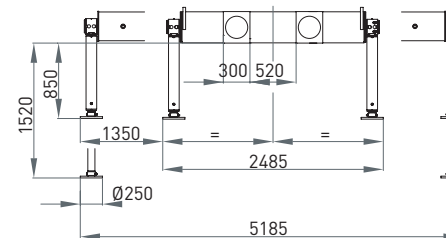

Schwenkabstützung schmal

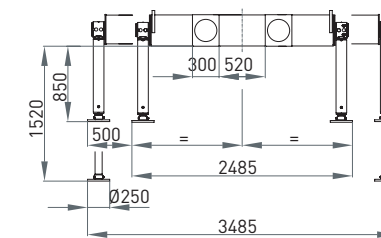

Vierkantabstützung breit

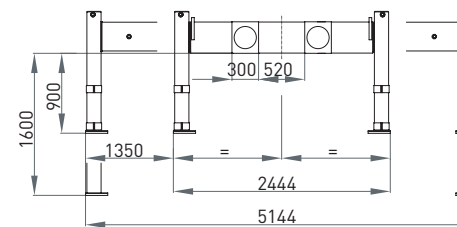

Vierkantabstüttug schmal

